


Pacific Downlight

An IP65 rated, stunning low-level Citizen LED COB exterior downlight, the Pacific range is designed for superyacht applications, specifically for low ceiling voids.

Engineered from mirror polished 316L stainless steel, this fitting is fixed or adjustable, and perfectly suited to perform in the harshest exterior maritime environments. The first fix sleeve, with its bespoke twist and lock mechanism, which comes with its own tool, is easy to install and maintain.

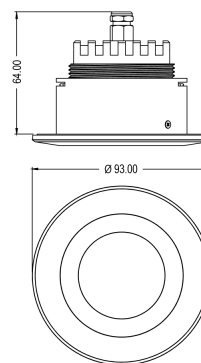

Format	Product code	Installation	Beam angle	Weight	Cut out	Wattage	Efficiency	Forward voltage	Current	Colour temperature	IP Rating	Lumen output	Standard finish
Adjustable	D3163	Exterior	12°	0.7kg	100mm	9.1w	126lm/w	34.9v	260mA	2700k	IP65	796lm	Polished/Brushed stainless
Adjustable	D3164	Exterior	24°	0.7kg	100mm	9.1w	126lm/w	34.9v	260mA	2700k	IP65	796lm	Polished/Brushed stainless
Adjustable	D3165	Exterior	38°	0.7kg	100mm	9.1w	126lm/w	34.9v	260mA	2700k	IP65	796lm	Polished/Brushed stainless
Fixed	D3154	Exterior	12°	0.3kg	69mm	9.1w	126lm/w	34.9v	260mA	2700k	IP65	796lm	Polished/Brushed stainless
Fixed	D3153	Exterior	24°	0.3kg	69mm	9.1w	126lm/w	34.9v	260mA	2700k	IP65	796lm	Polished/Brushed stainless
Fixed	D3152	Exterior	38°	0.3kg	69mm	9.1w	126lm/w	34.9v	260mA	2700k	IP65	796lm	Polished/Brushed stainless
Mini	D9008	Exterior	Narrow	0.2kg	48mm	4.55w	98lm/w	9.1v	500mA	2700k	IP65	450lm	Polished/Brushed stainless
Mini	D9010	Exterior	Wide	0.2kg	48mm	4.55w	98lm/w	9.1v	500mA	2700k	IP65	450lm	Polished/Brushed stainless

Additional finishes are available on request. All fittings will require a driver. Photometry (IES file) and installation instructions are available on request. Patent pending. Designs registered with GOV.UK