
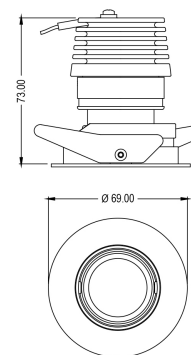


Sunbeam C Downlight

Our Sunbeam C range of fire rated downlights is available in three different variations to meet the aesthetic and functional requirements of any interior scheme, where fire protection is required.

The fitting is also available as IP54, making them suitable for bathroom applications. The Darklight, Adjustable Eyeball and Slash Adjustable versions are made with the addition of a 'sealing boot' to the rear. The adjustable light engine allows for accessories too - giving the ability to customise its lit effect to suit the exact needs of your project.

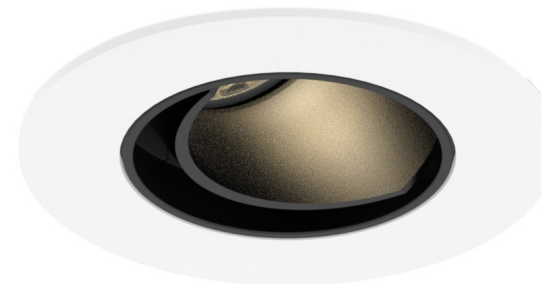

Slash Adjustable

Format	Product code	Installation	Beam angle	Weight	Cut out	Wattage	Efficiency	Forward voltage	Current	Colour temperature	IP Rating	Lumen output	Standard finish
Adjustable	SUN-TY1-27-12	Interior	12°	0.4kg	60mm	8.4w	90lm/w	11.9v	700mA	2700k	IP44	565lm	White
Adjustable	SUN-TY1-27-24	Interior	24°	0.4kg	60mm	8.4w	90lm/w	11.9v	700mA	2700k	IP44	575lm	White
Adjustable	SUN-TY1-27-38	Interior	38°	0.4kg	60mm	8.4w	90lm/w	11.9v	700mA	2700k	IP44	585lm	White
Slash Adjustable	SUN-TY2-27-12	Interior	12°	0.4kg	60mm	8.4w	90lm/w	11.9v	700mA	2700k	IP44	565lm	White
Slash Adjustable	SUN-TY2-27-24	Interior	24°	0.4kg	60mm	8.4w	90lm/w	11.9v	700mA	2700k	IP44	575lm	White
Slash Adjustable	SUN-TY2-27-38	Interior	38°	0.4kg	60mm	8.4w	90lm/w	11.9v	700mA	2700k	IP44	585lm	White
Darklight	SUN-C-EL1-27-12	Interior	12°	0.3kg	60mm	8.4w	90lm/w	11.9v	700mA	2700k	IP54	565lm	White
Darklight	SUN-C-EL1-27-24	Interior	24°	0.3kg	60mm	8.4w	90lm/w	11.9v	700mA	2700k	IP54	575lm	White
Darklight	SUN-C-EL1-27-38	Interior	38°	0.4kg	60mm	8.4w	90lm/w	11.9v	700mA	2700k	IP54	585lm	White



Additional finishes are available on request. All fittings will require a driver. Photometry (IES file) and installation instructions are available on request. Patent pending. Designs registered with GOV.UK

[Download sheet \(Part 1 of 2\)](#)

Sunbeam C Downlight

Our Sunbeam C range of fire rated downlights is available in three different variations to meet the aesthetic and functional requirements of any interior scheme, where fire protection is required.

The fitting is also available as IP54, making them suitable for bathroom applications. The Darklight, Adjustable Eyeball and Adjustable Slash versions are made with the addition of a 'sealing boot' to the rear. The adjustable light engine allows for accessories too - giving the ability to customise its lit effect to suit the exact needs of your project.

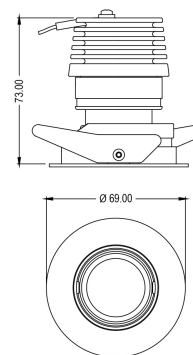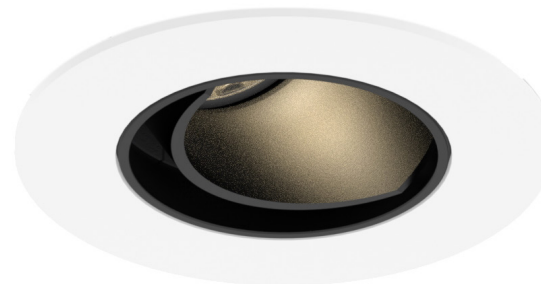

Format	Product code	Installation	Beam angle	Weight	Cut out	Wattage	Efficiency	Forward voltage	Current	Colour temperature	IP Rating	Lumen output	Standard finish
Adjustable IP54	SUN-C-TY1-27-12-IP54	Interior	12°	0.4kg	60mm	8.4w	90lm/w	11.9v	700mA	2700k	IP54	565lm	White
Adjustable IP54	SUN-C-TY1-27-24-IP54	Interior	24°	0.4kg	60mm	8.4w	90lm/w	11.9v	700mA	2700k	IP54	575lm	White
Adjustable IP54	SUN-C-TY1-27-38-IP54	Interior	38°	0.4kg	60mm	8.4w	90lm/w	11.9v	700mA	2700k	IP54	585lm	White
Slash Adjustable IP54	SUN-C-TY2-27-12-IP54	Interior	12°	0.4kg	60mm	8.4w	90lm/w	11.9v	700mA	2700k	IP54	565lm	White
Slash Adjustable IP54	SUN-C-TY2-27-24-IP54	Interior	24°	0.4kg	60mm	8.4w	90lm/w	11.9v	700mA	2700k	IP54	575lm	White
Slash Adjustable IP54	SUN-C-TY2-27-38-IP54	Interior	38°	0.4kg	60mm	8.4w	90lm/w	11.9v	700mA	2700k	IP54	585lm	White

Additional finishes are available on request. All fittings will require a driver. Photometry (IES file) and installation instructions are available on request. Patent pending. Designs registered with GOV.UK

[Download sheet \(Part 2 of 2\)](#)

