


Sunbeam B

Adjustable Downlight

Aluminum recessed downlight that incorporates a fixed Luminus COB LED featuring 25° tilt. Anti-glare baffle provides visual comfort and minimal glare.

Fixed via our constant torque springs, ideal for lath and plaster ceilings of irregular thickness. Supplied with a 300mm flying lead. Dimmable via any dimming protocol.

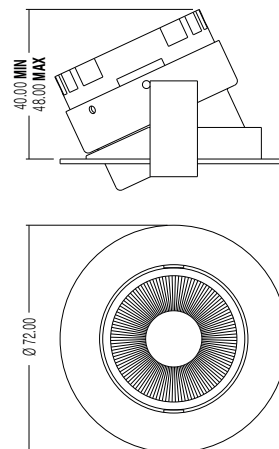

Format	Product code	Installation	Beam angle	Weight	Cut out	Wattage	Efficiency	Forward voltage	Current	Colour temperature	IP Rating	Lumen output	Standard finish
Adjustable Downlight	D3900	Interior	38°	0.2kg	64mm (2½")	9.1w	126lm/w	34.9v	260mA	2700k	IP20	747lm	White
Adjustable Downlight	D3901	Interior	24°	0.2kg	64mm (2½")	9.1w	126lm/w	34.9v	260mA	2700k	IP20	745lm	White
Adjustable Downlight	D3902	Interior	12°	0.2kg	64mm (2½")	9.1w	126lm/w	34.9v	260mA	2700k	IP20	613lm	White

Additional finishes are available on request. All fittings will require a driver. Photometry (IES file) and installation instructions are available on request. Patent pending. Designs registered with GOV.UK

