



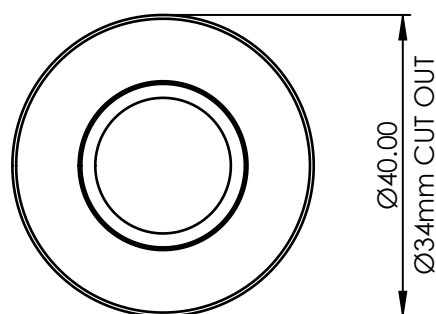

## Product data

## Downlight

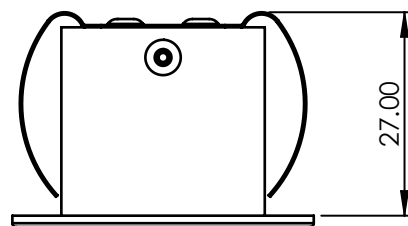

### Luminaire

Physical properties of the fitting

### Material

Aluminium

### Standard Finish

802 - Painted Hipca White

*\*Alternative finishes available on request\**

### Format

Fixed Downlight

### Optic beam angle

30°

### Installation

Interior

### Temperature Range

from -20°C to 50°C

### Cut out

Ø34mm

### Wiring

In series

### Performance

#### Constant Current (260mA)

Light source properties of the fitting

### Lumen Maintenance

High efficiency LEDs tested to LM80 standards, 50,000hrs lifetime with lumen maintenance at L70 etc

### Engine Lumens

233 lm

### Luminaire Lumens

183 lm

### LED Power Consumption

2.3 W

### CRI

95+

### TM30

94+

### Binning

2 Step

### Colour Temperature

2700K

### IP Rating

IP54

### Warranty

5 Years

### Weight

0.03 Kg

### Forward Voltage

9 V

### Key features

Exquisite miniature in-ceiling, or in-wall round bezelled wash light utilising a COB LED superbright light source. Supplied with a 2700K colour temperature LED as standard. The Zora is Ideal for creating subtle lighting effects in walkways, in circulation areas as a feature maker, or at changes of level.