Zora Square

ZORS 2.3W

Product data

Downlight

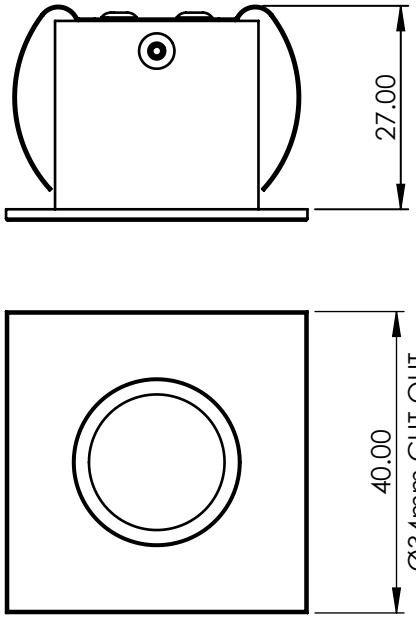

Luminaire
Physical properties of the fitting

Material
Aluminium
Standard Finish
802 - Painted Hipca White
Alternative finishes available on request
Format
Fixed Downlight
Optic beam angle
30°
Installation
Interior

Temperature Range
from -20°C to 50°C
Cut out
Ø34mm
Wiring
In series

Performance
Constant Current (260mA)
Light source properties of the fitting

Lumen Maintenace
High efficiency LEDs tested to LM80 standards, 50,000hrs lifetime with lumen maintenance at L70 etc
Engine Lumens
233 lm
Luminaire Lumens
183 lm
LED Power Consumption
2.3 W
CRI
95+
TM30
94+

Binning
2 Step
Colour Temperature
2700K
IP Rating
IP54
Warranty
5 Years
Weight
0.03 Kg
Forward Voltage
9 V

Key features
Exquisite miniature in-ceiling, or in-wall round bezelled wash light utilising a COB LED superbright light source. Supplied with a 2700K colour temperature LED as standard. The Zora is Ideal for creating subtle lighting effects in walkways, in circulation areas as a feature maker, or at changes of level.