Pacific Adjustable PACA 8.4W

Product data

Downlight

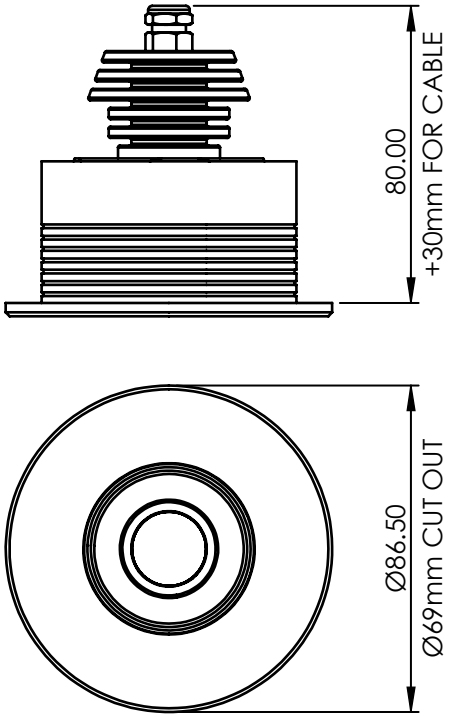

Luminaire
Physical properties of the fitting

Material
Stainless Steel
Standard Finish
901 - Polished Stainless
Format
Adjustable Downlight
Optic beam angle
20° / 30° / 40°
Installation
Interior / Exterior

Adjustability
20°
Temperature Range
from -20°C to 50°C
Cut out
Ø69mm
Wiring
In series

Performance
Constant Current (700mA)
Light source properties of the fitting

Lumen Maintenace
High efficiency LEDs tested to LM80 standards, 50,000hrs lifetime with lumen maintenance at L70 etc
Engine Lumens
512 lm
Luminaire Lumens
444 lm (30°)
LED Power Consumption
8.4 W
CRI
90+
TM30
90+

Binning
2 Step
Colour Temperature
2700K
IP Rating
IP67
Warranty
5 Years
Weight
0.6 Kg
Forward Voltage
12 V

Key features
Originally developed for marine applications. The Pacific Adjustable is an IP67 low profile adjustable downlight ideal for low ceiling voids. Housing the latest Luminus LED COB with fantastic colour rendering, efficacy and lumen package. This product is great for both exterior and interior applications.