# Pacific Mini

# PAM 4.5W

## Product data

Downlight

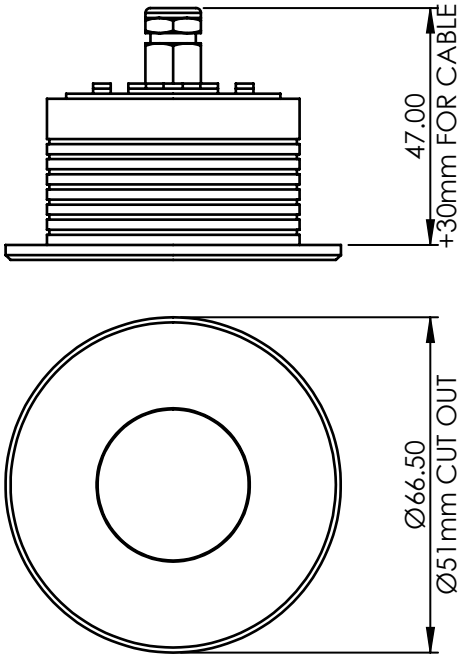


**Luminaire**
Physical properties of the fitting

**Material**
Stainless Steel
**Standard Finish**
901 - Polished Stainless
**Alternative finishes available on request**
**Format**
Fixed Downlight
**Optic beam angle**
18° / 38°
**Installation**
Interior / Exterior

**Temperature Range**
from -20°C to 50°C
**Cut out**
Ø51mm
**Wiring**
In series

**Performance**
**Constant Current (500mA)**
Light source properties of the fitting

**Lumen Maintenace**
High efficiency LEDs tested to LM80 standards, 50,000hrs lifetime with lumen maintenance at L70 etc
**Engine Lumens**
326 lm
**Luminaire Lumens**
215 lm (18°)
**LED Power Consumption**
4.5 W
**CRI**
95+
**TM30**
96+

**Binning**
2 Step
**Colour Temperature**
2700K
**IP Rating**
IP67
**Warranty**
5 Years
**Weight**
0.3 Kg
**Forward Voltage**
9 V

**Key features**
Originally developed for marine applications. The Pacific Mini is an IP67 low profile downlight ideal for low ceiling voids. Housing the latest Luminus LED with fantastic colour rendering, efficacy and lumen package. This product is great for both exterior and interior applications.