Sunbeam Mini Chamfered

SBMC 3.2W

Product data

Downlight

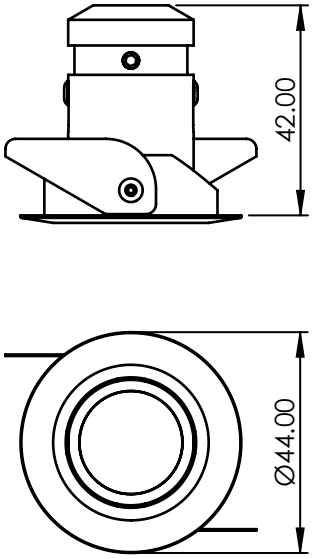

Luminaire
Physical properties of the fitting

Material
Aluminium
Standard Finish
802 - Hipca White
Alternative finishes available on request
Format
Adjustable Downlight
Optic beam angle
30°
Installation
Interior

Adjustability
30°
Temperature Range
from -20°C to 50°C
Cut out
Ø38mm
Wiring
In series

Performance
Constant Current (350mA)
Light source properties of the fitting

Lumen Maintenace
High efficiency LEDs tested to LM80 standards, 50,000hrs lifetime with lumen maintenance at L70 etc
Engine Lumens
295 lm
Luminaire Lumens
254 lm
LED Power Consumption
3.2 W
CRI
95+
TM30
93+

Binning
2 Step
Colour Temperature
2700K
IP Rating
IP40
Warranty
5 Years
Weight
0.1 Kg
Forward Voltage
9 V

Key features
Miniature version of the Sunbeam. Beautifully turned and machined in aluminium, this directional recessed LED downlight has a warm white colour temperature and a beam width of 30° as standard. Ideal for creative lighting effects and areas where space is at a premium. Available with switched or dimmable driver.