

Stelline LS-10-HB

Flexible LED striplights for exterior or interior applications. Available in a multitude of sizes and bend directions.

Fully customisable, supplied cut to length and factory sealed, Stelline is available with White, RGB, RGBW, Dynamic White or Dim to Warm LED's to suit your exact requirements. Feed cables can be supplied protruding from the end, side or bottom of the strip and are available in pre-cut lengths of up to 10,000mm. Suitable for the harshest installation environments, Stelline is saltwater, UV, flame and solvent resistant with an operating temperature range of -40 °C - +55 °C and IK08 impact rating.

Bottom Cable Entry




End Cable Entry




Side Cable Entry



End Cap

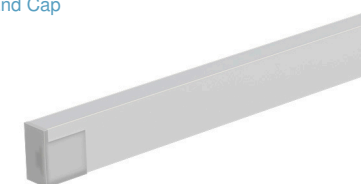

Anti-Wicking Ferrule

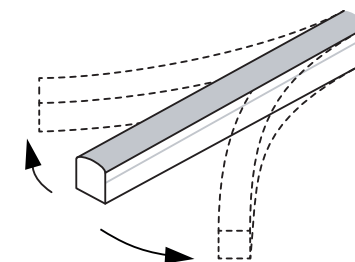

Format	Dimensions	Voltage	Wattage	Colour Temperature	Output	IP Rating	Temperature Range	Max Length	Cut Increment	Min Bend Radius
LS-10B White	18mm x 9mm	24V	4.5W/m	2700K / 3000K / 4000K	130 lm/m	67	-40°C - +55°C	30m	83.34mm	45mm

All fittings will require a 24VDC constant voltage driver.



Stelline LS-15-HB

Flexible LED striplights for exterior or interior applications. Available in a multitude of sizes and bend directions.

Fully customisable, supplied cut to length and factory sealed, Stelline is available with White, RGB, RGBW, Dynamic White or Dim to Warm LED's to suit your exact requirements. Feed cables can be supplied protruding from the end, side or bottom of the strip and are available in pre-cut lengths of up to 10,000mm. Suitable for the harshest installation environments, Stelline is saltwater, UV, flame and solvent resistant with an operating temperature range of -40 °C - +55 °C and IK08 impact rating.

Bottom Cable Entry



End Cable Entry




Side Cable Entry



End Cap



Anti-Wicking Ferrule

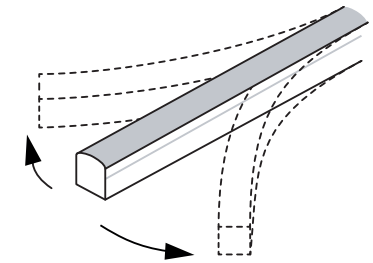

Format	Dimensions	Voltage	Wattage	Colour Temperature	Output	IP Rating	Temperature Range	Max Length	Cut Increment	Min Bend Radius
LS-15B White	21mm x 11.5mm	24V	12W/m	2700K / 3000K / 4000K	400 lm/m	67	-40°C - +55°C	15m	83.34mm	60mm
LS-15A RGB	21mm x 11.5mm	24V	12W/m	N/A	N/A	67	-40°C - +55°C	7m	100mm	60mm
LS-15E RGBW	21mm x 11.5mm	24V	15W/m	2700K / 4000K	120 lm/m	67	-40°C - +45°C	8m	100mm	60mm
LS-15D Dynamic White	21mm x 11.5mm	24V	12W/m	2200K - 5700K	140 lm/m - 170 lm/m	67	-40°C - +55°C	15m	83.34mm	60mm
LS-15DTW Dim to Warm	21mm x 11.5mm	24V	12W/m	1800K - 3000K	2 lm/m - 340 lm/m	67	-40°C - +55°C	15m	83.34mm	60mm

All fittings will require a 24VDC constant voltage driver.

Stelline LS-22-HB

Flexible LED striplights for exterior or interior applications. Available in a multitude of sizes and bend directions.

Fully customisable, supplied cut to length and factory sealed, Stelline is available with White, RGB, RGBW, Dynamic White or Dim to Warm LED's to suit your exact requirements. Feed cables can be supplied protruding from the end, side or bottom of the strip and are available in pre-cut lengths of up to 10,000mm. Suitable for the harshest installation environments, Stelline is saltwater, UV, flame and solvent resistant with an operating temperature range of -40 °C - +55 °C and IK08 impact rating.

Bottom Cable Entry



End Cable Entry




Side Cable Entry



End Cap



Anti-Wicking Ferrule

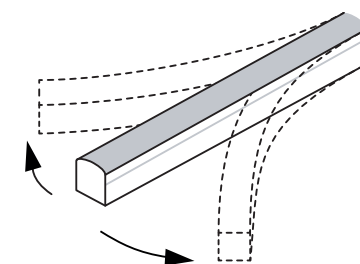

Format	Dimensions	Voltage	Wattage	Colour Temperature	Output	IP Rating	Temperature Range	Max Length	Cut Increment	Min Bend Radius
LS-22B White	16mm x 17mm	24V	12W/m	2700K / 3000K / 4000K	470 lm/m	67	-40°C - +55°C	15m	55.56mm	150mm
LS-22A RGB	16mm x 17mm	24V	12W/m	N/A	N/A	67	-40°C - +55°C	10m	83.34mm	150mm
LS-22D Dynamic White	16mm x 17mm	24V	12W/m	2200K - 5700K	220 lm/m - 270 lm/m	67	-40°C - +55°C	15m	83.34mm	150mm
LS-22DTW Dim to Warm	16mm x 17mm	24V	12W/m	1800K - 3000K	3 lm/m - 500 lm/m	67	-40°C - +55°C	15m	62.5mm	150mm

All fittings will require a 24VDC constant voltage driver.

Stelline LS-22-VB

Flexible LED striplights for exterior or interior applications. Available in a multitude of sizes and bend directions.

Fully customisable, supplied cut to length and factory sealed, Stelline is available with White, RGB, RGBW, Dynamic White or Dim to Warm LED's to suit your exact requirements. Feed cables can be supplied protruding from the end, side or bottom of the strip and are available in pre-cut lengths of up to 10,000mm. Suitable for the harshest installation environments, Stelline is saltwater, UV, flame and solvent resistant with an operating temperature range of -40 °C - +55 °C and IK08 impact rating.

Bottom Cable Entry



End Cap




End Cable Entry



Anti-Wicking Ferrule



Side Cable Entry



Format	Dimensions	Voltage	Wattage	Colour Temperature	Output	IP Rating	Temperature Range	Max Length	Cut Increment	Min Bend Radius
LS-22B White	16mm x 17mm	24V	12W/m	2700K / 3000K / 4000K	560 lm/m	67	-40°C - +55°C	15m	55.56mm	150mm
LS-22A RGB	16mm x 17mm	24V	12W/m	N/A	N/A	67	-40°C - +55°C	10m	83.34mm	150mm
LS-22E RGBW	16mm x 17mm	24V	15W/m	2700K / 4000K	200 lm/m	67	-40°C - +55°C	8m	83.34mm	150mm
LS-22D Dynamic White	16mm x 17mm	24V	12W/m	2200K - 5700K	220 lm/m - 270 lm/m	67	-40°C - +55°C	15m	83.34mm	150mm
LS-22DTW Dim to Warm	16mm x 17mm	24V	12W/m	1800K - 3000K	3 lm/m - 500 lm/m	67	-40°C - +50°C	15m	62.5mm	150mm

All fittings will require a 24VDC constant voltage driver.

Stelline LS-23-HB

Flexible LED striplights for exterior or interior applications. Available in a multitude of sizes and bend directions.

Fully customisable, supplied cut to length and factory sealed, Stelline is available with White, RGB, RGBW, Dynamic White or Dim to Warm LED's to suit your exact requirements. Feed cables can be supplied protruding from the end, side or bottom of the strip and are available in pre-cut lengths of up to 10,000mm. Suitable for the harshest installation environments, Stelline is saltwater, UV, flame and solvent resistant with an operating temperature range of -40 °C - +55 °C and IK08 impact rating.

Bottom Cable Entry




End Cable Entry



Side Cable Entry



End Cap

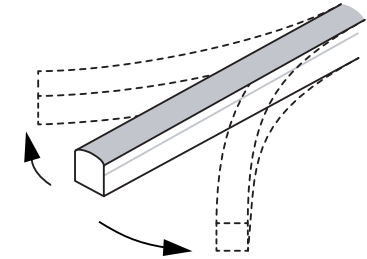

Format	Dimensions	Voltage	Wattage	Colour Temperature	Output	IP Rating	Temperature Range	Max Length	Cut Increment	Min Bend Radius
LS-23B White	10mm x 10mm	24V	4.5W/m	2700K / 3000K / 4000K	220 lm/m	65	-40°C - +50°C	15m	83.34mm	50mm

All fittings will require a 24VDC constant voltage driver.

Stelline LS-23-VB

Flexible LED striplights for exterior or interior applications. Available in a multitude of sizes and bend directions.

Fully customisable, supplied cut to length and factory sealed, Stelline is available with White, RGB, RGBW, Dynamic White or Dim to Warm LED's to suit your exact requirements. Feed cables can be supplied protruding from the end, side or bottom of the strip and are available in pre-cut lengths of up to 10,000mm. Suitable for the harshest installation environments, Stelline is saltwater, UV, flame and solvent resistant with an operating temperature range of -40 °C - +55 °C and IK08 impact rating.

Bottom Cable Entry




End Cable Entry



Side Cable Entry



End Cap



Format	Dimensions	Voltage	Wattage	Colour Temperature	Output	IP Rating	Temperature Range	Max Length	Cut Increment	Min Bend Radius
LS-23B White	10mm x 10mm	24V	4.5W/m	2700K / 3000K / 4000K	220 lm/m	65	-40°C - +55°C	15m	83.34mm	50mm

All fittings will require a 24VDC constant voltage driver.